High Pressure Ball Valves






Features

- Stainless steel construction
- Pressure ratings up to 6,000 psig
- Quarter turn operation
- Bi-directional flow
- Free-floating ball
- FKM end connector and stem seals
- PTFE and PEEK seat options
- 1/8" to 3/4" tube and NPT connections available
- Standard panel mounting capabilities
- Lockout devices and color-coded handles available

#	Components	Stainless Steel
1	Handle	Nylon with Brass Insert
2	Screw	Stainless Steel
З	Gland Nut	316 SS
4	Stem Washer	Nylatron
5	Stem	316 SS
6	Stem Back-up Ring	PTFE
7	Stem Seal	Fluorocarbon FKM
8	Panel Lock Nut	316 SS
9	Body	316 SS
10	Ball	316 SS
11	Seat	PTFE, PEEK
12	End Connector Seal	Fluorocarbon FKM
13	End Connector	316 SS
	Lubricant Perfluoropolyether Gre	

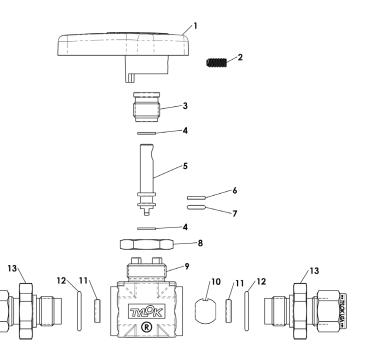


Seat Material	PTFE	PEEK
Designator	-Т	-PK
Pressure Rating @100°F (psig)	1500	6000
Temperature Rating (°F)	-15 to 400	-15 to 400


Part Number Shown:

SS-6-DTT-6-6-PK

CBC-Lok® double ferrule tube ends are completely interchangeable with Swagelok® & Parker A-Lok® tube ends.

CS-Lok® single ferrule tube ends are completely interchangeable with Parker CPI® tube ends.

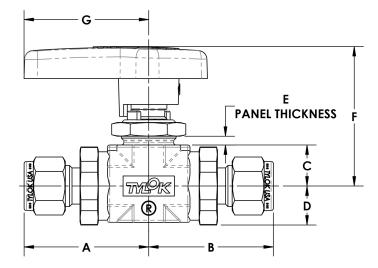



HP Series

Valve Dimension Chart

	Part	Con	nection	Orifice					Dimen	sions ((Inches	5)		
	Number	Port A	Port B	Inch (mm)	А	В	С	D	E	F	G	н	Panel Hole	Panel Nut Hex
	SS-4-DTT-2-2*	1/8" (CBC-Lok		1 5 4	1.54 1.54								
4	SS-4-STT-2-2*	1/8"	' CS-Lok	7	1.04	1.04								
	SS-4-DTT-4-4	1/4" CBC-Lok 1/4" CS-Lok		7	1.00	1.00	4.00							
SERIES	SS-4-STT-4-4				1.63	1.63	0.50	0.47	1 /0	1 00	1.70	0.00	0.75	7/8
浜	SS-4-1FF-2-2	1/8" Fe	emale NPT	0.188 (4.8)	1.21	1.21	0.50	0.47	1/0	1.09	1.70	U.00	0.75	// 0
0,	SS-4-1FF-4-4	1/4" Fe	emale NPT	7	1.46	1.46								
	SS-4-1MM-2-2	1/8" N	Vale NPT		1.30	1.30								
	SS-4-1MM-4-4	1/4" N	Vale NPT		1.49	1.49								
	SS-6-DTT-4-4*	1/4"	CBC-Lok		1.65	1.65								
	SS-6-STT-4-4*	1/4"	' CS-Lok		1.00 1.00			1						
	SS-6-DTT-6-6	3/8"	CBC-Lok	0.250 (6.4)	1.71	1.71								
ى	SS-6-STT-6-6	3/8"	' CS-Lok		1.7 1	1.7 1								
	SS-6-DTT-8-8	1/2"	CBC-Lok		1.83	1.83								
SERIES	SS-6-STT-8-8	1/2"	' CS-Lok		1.00	1.00	0.56	0.54 5	5/32	1 91	1 1 70	nga	0.75	7/8
L L L	SS-6-1FF-4-4	1/4" Fe	emale NPT	0.230 (0.4)	1.51	1.51	0.00			1.01	0	0.04	0.70	,, 0
S	SS-6-1FF-6-6	3/8" Fe	emale NPT											
	SS-6-1FF-8-8	1/2" Fe	emale NPT		1.70	1.70								
	SS-6-1MM-4-4	1/4" N	Male NPT		1.51	1.51								
	SS-6-1MM-6-6	3/8" N	Vale NPT		1.01	1.01								
	SS-6-1MM-8-8	/	Male NPT		1.70	1.70								
	SS-8-DTT-6-6*	/	CBC-Lok		1.85	1.85								
	SS-8-STT-6-6*	3/8"	' CS-Lok											
	SS-8-DTT-8-8	,	CBC-Lok		1.96	1.96								
00	SS-8-STT-8-8	,	' CS-Lok		1.00	1.00	1							
ы С С	SS-8-DTT-12-12	,	CBC-Lok		1.97	1.97								
SERIES	SS-8-STT-12-12	,	' CS-Lok	0.375 (9.5)			0.81	0.65	5/32	2.29	1.96	1.13	0.88	1-1/16
ß	SS-8-1FF-6-6	/	emale NPT	4	1.61	1.61								
	SS-8-1FF-8-8	/	emale NPT	4	1.78	1.78	4							
	SS-8-1FF-12-12	/	emale NPT	4	1.90	1.90		0.72						
	SS-8-1MM-6-6	/	Male NPT	4	1.65	1.65	4	0.65						
	SS-8-1MM-8-8	1/2" N	Male NPT		1.84	1.84								

* Reduced Port



HP Series Ball Valve are ordered as listed in this catalog by inserting the material code before the part number. HP Series Valves can be identified through the part number as to material, valve series, style, valve configurations, port size, and seat material. The part number describes a complete ball valve assembly.

Special Configurations available upon request.

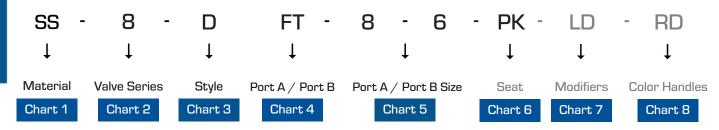


Chart 1- Material		(Chart 2- Valve Series			Chart 3- Style
SS	Stainless Steel	4	0.188" Orifice		D	CBC-Lok
		6	0.250" Orifice		S	CS-Lok
		8	0.375" Orifice		1	Tylok Standard

Chart 4- Valve Configuration						
Туре	Port A	Port B				
TT	Tube	Tube				
MM ¹	Male NPT	Male NPT				
FF ¹	Female NPT	Female NPT				
MF ¹	Male NPT	Female NPT				
FM ¹	Female NPT	Male NPT				
TM	Tube	Male NPT				
MT	Male NPT	Tube				
TF	Tube	Female NPT				
FT	Female NPT	Tube				

¹ Use Style 1 from Chart 3 for this type of configuration.

Chart 5- Port Size						
Designator	Tube OD (Inches)	Pipe Thread (NPT)				
2	1/8"	1/8-27				
4	1/4"	1/4-18				
6	3/8"	3/8-18				
8	1/2"	1/2-14				
12	3/4"	3/4-14				

· See dimension chart for available sizes.

Chart 6- Seat					
Т	PTFE				
ΡK	PEEK				

	Chart 7- Modifiers
LD	Locking Handle

C	Chart 8- Color Handles				
RD	Red Handle				
BL	Blue Handle				
GN	Green Handle				
OG	Orange Handle				
YW	Yellow Handle				

· Black handles are default on HP ball valves.

Example: SS-4-DTT-4-4-T

Designates a 1500 psi stainless steel ball valve, 0.188" orifice with 1/4" CBC-Lok® end connections and PTFE seats.

Example: SS-6-1FF-6-4-PK

Designates a 5000 psi stainless steel ball valve, 0.250" orifice with a 3/8" Female NPT end connections for port A and a 1/4" female NPT end connection for port B and PEEK seats.

Color	Valve Adder	4 & 6 Series Kit	8 Series Kit
Black (Standard)		KIT-46-BK	KIT-8-BK
Red	-RD	KIT-46-RD	KIT-8-RD
Blue	-BL	KIT-46-BL	KIT-8-BL
Green	-GN	KIT-46-GN	KIT-8-GN
Orange	-OG	KIT-46-OG	KIT-8-OG
Yellow	-YW	KIT-46-YW	KIT-8-YW

Handle Options

Kits come with a Handle and Set Screw. Sample Part Number:

• SS-6-DTT-8-8-K-BL

PEEK Seated 6 Series HP Ball Valve with 1/2" CBC-Lok End Connectors and a Blue Handle

Locking Device


Valve Adder	4 & 6 Series Kit	8 Series Kit
-LD	KIT-46-HPBV-LD	KIT-8-HPBV-LD




Kits come with a Locking Device

- SS-6-DTT-8-8-PK-LD
 - PEEK Seated 6 Series HP Ball Valve with 1/2" CBC-Lok End Connectors and a Locking Device



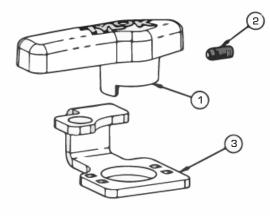

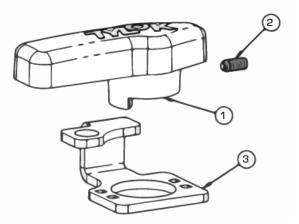

8 Series

4 & 6 Series

Kit Number	Description	Handle	Set Screw	Locking Bracket
KIT-46-BK*	4/6 Series Ball Valve Black Handle Kit	6-BV-16-BK	BV-16B	N/A
KIT-8-BK*	8 Series Ball Valve Black Handle Kit	8-BV-16-BK	BV-16B	N/A
-	-	-	-	-
KIT-46-HPBV-LD	4/6 Series Locking Device	N/A	N/A	SS-6-BV-17
KIT-8-HPBV-LD	8 Series Locking Device	N/A	N/A	SS-6-BV-17
-	-	-	-	-
KIT-46-HPBV-LDH* *	4/6 Series Ball Valve Black Handle Kit with Locking Device	6-BV-16-BK	BV-16B	SS-6-BV-17
KIT-8-HPBV-LDH * *	8 Series Ball Valve Black Handle Kit with Locking Device	8-BV-16-BK	BV-16B	SS-6-BV-17

* "BK" designates black colored handle, other color handles are available and should be verified against part number.

** By default "LDH" kits contain black handles, however other color handles are available and should be verified against part number.